

PRODUCT DATA SHEET

NEMA MW 82-C

Class 180 - Copper - Round Conductors - Polyurethane coated magnet wire / winding wire.

APPLICATION

Soderex®/180 magnet wire is designed for applications requiring both high thermal resistance and low soldering temperatures.

Soderex®/180 consists of a solder-strippable modified polyurethane film insulation.

Soderex®/180 is recommended but not limited to the following applications:

- Encapsulated and molded coils
- Appliance controls and relays
- Automotive controls, ignition coils and relays
- Bobbin wound coils
- Specialty power transformers
- Solenoids
- Linear motors
- RF Coils

SOLDERABLE INSULATION COMPARISON:

	Salt Water Pinhole Test	Soldering Temperature	Glass Transition Temperature	Thermo-plastic Flow
Soderex®/155 (MW 79)	OK	390°C	Lower	Lower
Soderex®/180 (MW 82)	Better	390°C	Highest	Higher
Solidex® (MW 77)	Poor	470°C	Higher	Highest

ENGINEERING HIGHLIGHTS

1. THERMAL CLASSIFICATION

Soderex®/180 magnet wire is Class 180 when measured in accordance with the ASTM-D2307 test procedure. Heat shock resistance exceeds 200°C.

2. THERMOPLASTIC FLOW

Thermoplastic flow or cut-through temperature of Soderex®/180 magnet wire is in the 225°C plus range; well above the maximum process conditions found in molded coil work, trickle impregnation processes and standard pre-heat varnish cycles specified for normal Class 130, 155 and 180 systems.

3. SOLDERABILITY

Soderex®/180 magnet wire solder strips readily and much more easily than MW 77 type products. It solders consistently at temperatures as low as 390°C.

4. WINDABILITY

Flexibility and adhesion properties of the Soderex®/180 magnet wire film are more than adequate for all but the most severe fine wire winding applications.

5. ELECTRICAL

Soderex®/180 magnet wire insulation exhibits high dielectric strength retention under high humidity conditions. The low dissipation factor of Soderex®/180 magnet wire at high frequencies makes it a prime candidate for RF coil applications.

6. CHEMICAL

The solvent resistant properties of Soderex®/180 are suitable for most classes 105, 130, 155 and 180 varnishes, encapsulants, and treating resins. It has improved salt water resistance compared to other solderable wires.

7. NORMAL AVAILABILITY

- Round Copper Sizes:
25-46 AWG, Single Build
25-46 AWG, Heavy Build

Please consult Magnet Wire Marketing for additional size (including metric) and build information.

PRODUCT DATA SHEET

Performance data is representative of 36 AWG heavy build copper. **

THERMAL PROPERTIES

HEAT SHOCK RESISTANCE

TYPICAL PERFORMANCE: No cracks @ 200°C
REQUIRED PERFORMANCE: 20%, 3 XD, no cracks†

SOLDERABILITY

TYPICAL PERFORMANCE: 1 second @ 390°C
REQUIRED PERFORMANCE: ≤ 5 seconds @ 390°C†

THERMAL STABILITY

TYPICAL PERFORMANCE: 193°C
REQUIRED PERFORMANCE: 180°C minimum†

THERMOPLASTIC FLOW

TYPICAL PERFORMANCE: 260°C
REQUIRED PERFORMANCE: 225°C†

PHYSICAL PROPERTIES

ADHESION AND FLEXIBILITY

TYPICAL PERFORMANCE: No cracks
REQUIRED PERFORMANCE: 20%, 1XD, no cracks†

CONDUCTOR ELONGATION

TYPICAL PERFORMANCE: 26%
REQUIRED PERFORMANCE: 20% minimum†

ELECTRICAL PROPERTIES

CONTINUITY

TYPICAL PERFORMANCE: ≤ 1 fault/100 feet
REQUIRED PERFORMANCE: ≤ 5 faults/100 feet†


DIELECTRIC BREAKDOWN VOLTAGE

ROOM TEMPERATURE

TYPICAL PERFORMANCE: 6400 volts, avg.
REQUIRED PERFORMANCE: 2600 volts, minimum†

RATED TEMPERATURE

TYPICAL PERFORMANCE: 4900 volts, avg.
REQUIRED PERFORMANCE: 1950 volts, minimum†

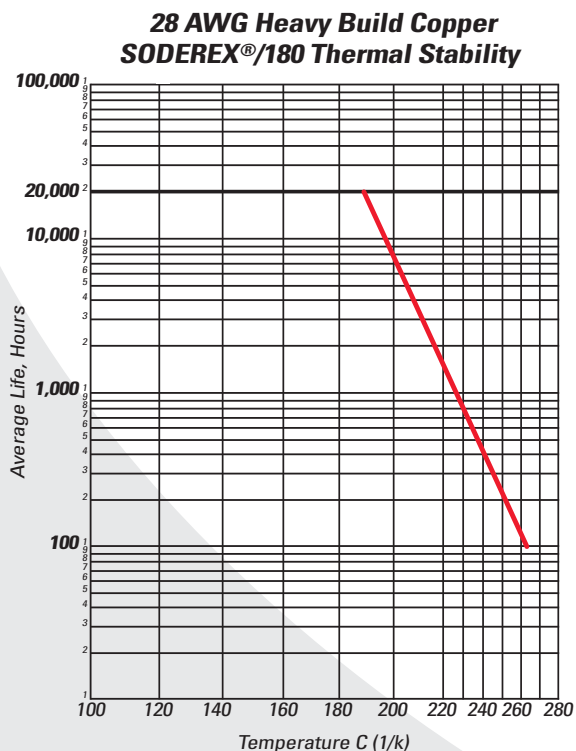

** The values shown represent typical average results and are not intended to be used as design data or specification limits.

† Requirements of NEMA MW 1000; Section MW 82-C.

All Sales are subject to Essex® Standard Terms and Conditions as posted on www.superioressex.com. Copies available upon request.



Essex Group, Inc.
1601 Wall Street
Fort Wayne, IN 46802
260.461.4000

© 2008 Essex Group, Inc.